


安装示意图
Assembly Layout

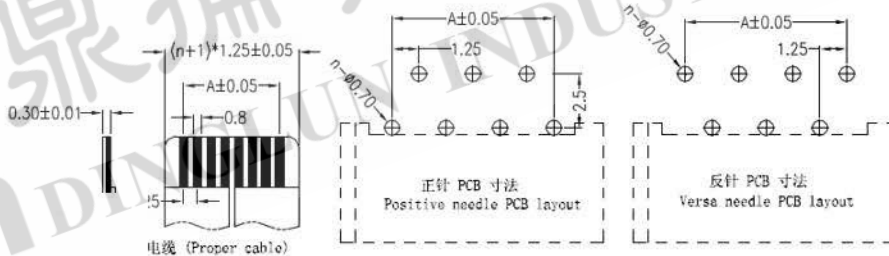

电缆 (Proper cable)

SPEC :

- Housing: PA9T UL 94V-0
Color: BLACK
- Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC,DC
- Temperature Rating : -25°C ~ +85°C
- Dielectric Withstanding Voltage : 500V AC/Min

Pin PR	DIM.A	DIM.B	DIM.C
4	3.75	6.40	8.50
5	5.00	7.65	9.75
6	6.25	8.90	11.00
7	7.50	10.15	12.25
8	8.75	11.40	13.50
9	10.00	12.65	14.75
10	11.25	13.90	16.00
11	12.50	15.15	17.25
12	13.75	16.40	18.50
13	15.00	17.65	19.75
14	16.25	18.90	21.00
15	17.50	20.15	22.25
16	18.75	21.40	23.50
17	20.00	22.65	24.75
18	21.25	23.90	26.00
19	22.50	25.15	27.25
20	23.75	26.40	28.50
21	25.00	27.65	29.75
22	26.25	28.90	31.00
23	27.50	30.15	32.25
24	28.75	31.40	33.50
25	30.00	32.65	34.75
26	31.25	33.90	36.00
27	32.50	35.15	37.25
28	33.75	36.40	38.50
29	35.00	37.65	39.75
30	36.25	38.90	41.00
31	37.50	40.15	42.25
32	38.75	41.40	43.50
33	40.00	42.65	44.75
34	41.25	43.90	46.00
35	42.50	45.15	47.25
36	43.75	46.40	48.50
37	45.00	47.65	49.75
38	46.25	48.90	51.00
39	47.50	50.15	52.25
40	48.75	51.40	53.50

ORDERING INFORMATION:

FPCD - 12300 IWDP - xx - x - x - x

- 1=ROHS 2=HALOGEN FREE
- PLATING:T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.25mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO. LTD.

TITLE
FPC 1.25PH 3.0H無蓋斜角彎插雙接正腳位

DRAWN:	<i>michael lin</i> 2010/10/22	TOLERANCE	.X±0.30 None	SCALE	P/N NO.	FPCD-12300IWDP-XX-XX
CHECKED:	<i>Eddie Lin</i> 2010/10/22		.XX±0.20 .XXX±0.10	UNIT	DWG. NO.	
APPROVED:	<i>Eddie Lin</i> 2010/10/22	PROJECTION	REV.	A	CUSTOMER P/N NO.	

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			