
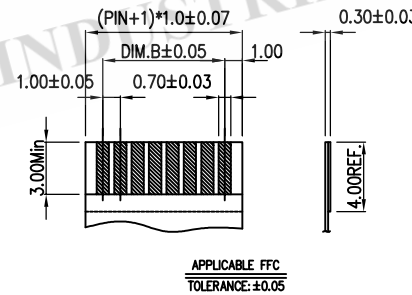
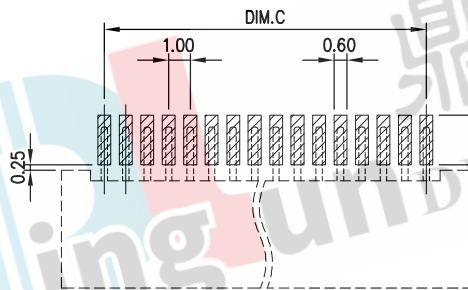
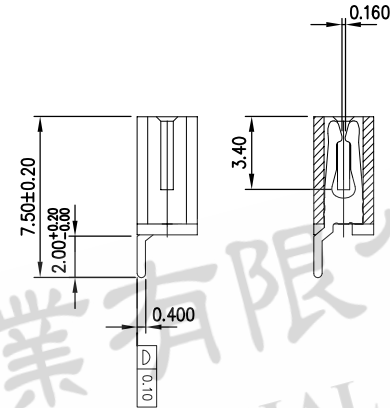


- SPEC :
- 1.Housing:UL 94V-0
  - 2.Contact:Copper Alloy
  - 3.Plating:Tin Plated Over Nickel
  - 4.Current Rating:1 Amp.
  - 5.Dielectric Withstanding Voltage:500V AC/Min
  - 6.Insulation Resistance:500 Ohms/Min
  - 7.Contact Resistance:30 Ohms Max.

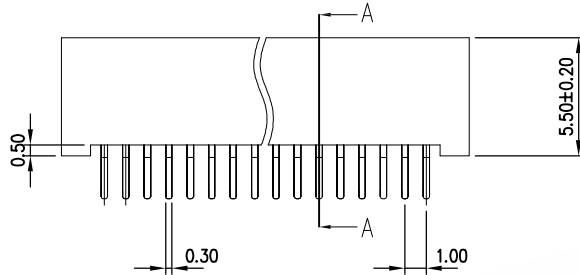

●: 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C
	2	5.00	3.10	1.00
	3	6.00	4.10	2.00
	4	7.00	5.10	3.00
	5	8.00	6.10	4.00
	6	9.00	7.10	5.00
	7	10.00	8.10	6.00
	8	11.00	9.10	7.00
	9	12.00	10.10	8.00
	10	13.00	11.10	9.00
	11	14.00	12.10	10.00
	12	15.00	13.10	11.00
	13	16.00	14.10	12.00
	14	17.00	15.10	13.00
	15	18.00	16.10	14.00
	16	19.00	17.10	15.00
	17	20.00	18.10	16.00
	18	21.00	19.10	17.00
	19	22.00	20.10	18.00
	20	23.00	21.10	19.00
	21	24.00	22.10	20.00
	22	25.00	23.10	21.00
	23	26.00	24.10	22.00
	24	27.00	25.10	23.00
	25	28.00	26.10	24.00
	26	29.00	27.10	25.00
	27	30.00	28.10	26.00
	28	31.00	29.10	27.00
	29	32.00	30.10	28.00
	30	33.00	31.10	29.00
	31	34.00	32.10	30.00
	32	35.00	33.10	31.00
	33	36.00	34.10	32.00
	34	37.00	35.10	33.00
	35	38.00	36.10	34.00
	36	39.00	37.10	35.00

ORDERING INFORMATION:

FPCG - 10280 IHDE - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.25mm
- FPC SERIES

PCB LAYOUT



**鼎掄實業有限公司**  
**DINGLUN INDUSTRIAL CO., LTD.**

TITLE  
 FPC 1.00PH 2.8H 無蓋斜角貼雙接

DRAWN:	michael lin 2011/01/23	TOLERANCE	SCALE
CHECKED:	Eddie Liu 2011/01/23	.X±0.30	None
APPROVED:	Eddie Liu 2011/01/23	.XX±0.20	UNIT
		.XXX±0.10	mm
		PROJECTION	REV.
		⊕ ⊖	A

P/N NO.	FPCG-10280IHDE-xx-xx
DWG. NO.	
CUSTOMER P/N NO.	

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			