

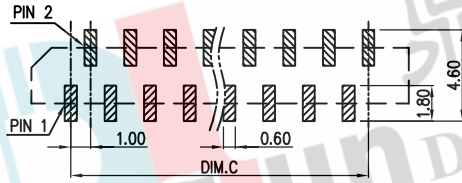



- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Black
 - Locker: High-Temp Plastic, UL94-V
Color: White
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -25°C~+85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

FPC/FFC T=0.30±0.05

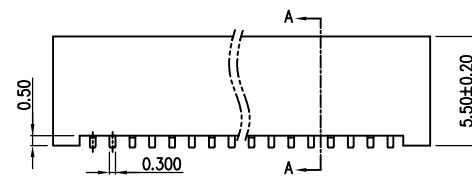

RECOMMENDED P.C.B LAYOUT

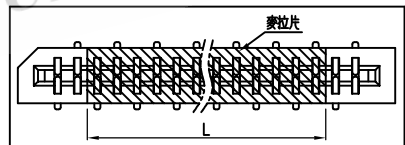

注：依客戶要求貼鍍拉片
 2~5PIN 鍍拉片長度 L 為 4mm
 6~13PIN 鍍拉片長度 L 為 8mm
 14~36PIN 鍍拉片長度 L 為 12mm

ORDERING INFORMATION:

FPCG - 10560 ITDP - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
2	5.00	3.10	1.00	21	24.00	22.10	20.00
3	6.00	4.10	2.00	22	25.00	23.10	21.00
4	7.00	5.10	3.00	23	26.00	24.10	22.00
5	8.00	6.10	4.00	24	27.00	25.10	23.00
6	9.00	7.10	5.00	25	28.00	26.10	24.00
7	10.00	8.10	6.00	26	29.00	27.10	25.00
8	11.00	9.10	7.00	27	30.00	28.10	26.00
9	12.00	10.10	8.00	28	31.00	29.10	27.00
10	13.00	11.10	9.00	29	32.00	30.10	28.00
11	14.00	12.10	10.00	30	33.00	31.10	29.00
12	15.00	13.10	11.00	31	34.00	32.10	30.00
13	16.00	14.10	12.00	32	35.00	33.10	31.00
14	17.00	15.10	13.00	33	36.00	34.10	32.00
15	18.00	16.10	14.00	34	37.00	35.10	33.00
16	19.00	17.10	15.00	35	38.00	36.10	34.00
17	20.00	18.10	16.00	36	39.00	37.10	35.00
18	21.00	19.10	17.00				
19	22.00	20.10	18.00				
20	23.00	21.10	19.00				



鼎掄實業有限公司
 DINGLUN INDUSTRIAL CO., LTD.

TITLE
 FPC 1.0PH 5.6H 無蓋斜角立貼雙接正腳位

DRAWN:	michael lin 2017/08/22	TOLERANCE	SCALE	P/N NO.
CHECKED:	Eddie Liu 2017/08/22	.XX±0.20	None	FPCG-10560ITDP-xx-xx
APPROVED:	Eddie Liu 2017/08/23	.XXX±0.10	UNIT	DWG. NO.
		PROJECTION	REV.	CUSTOMER P/N NO.
		⊕	A	

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			
8			
9			