


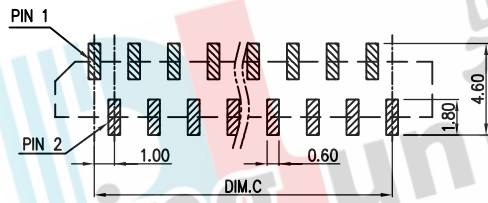


FPC/FFC T=0.30±0.05



- SPEC :
- Housing: High-Temp Plastic, UL94-V  
Color: Black
  - Locker: High-Temp Plastic, UL94-V  
Color: White
  - Contact: Phosphor Bronze  
Initial: 30m Ohms Max.  
Voltage Rating: 50V AC, DC
  - Solder Tab: BRASS
  - Temperature Rating: -25°C~+85°C
  - Dielectric Withstanding Voltage: 500V AC/Min

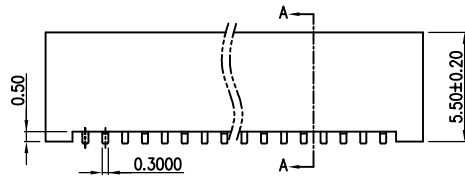


RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION:

FPCG - 10560 ITDR - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES

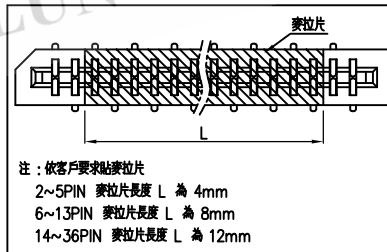

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
2	5.00	3.10	1.00	21	24.00	22.10	20.00
3	6.00	4.10	2.00	22	25.00	23.10	21.00
4	7.00	5.10	3.00	23	26.00	24.10	22.00
5	8.00	6.10	4.00	24	27.00	25.10	23.00
6	9.00	7.10	5.00	25	28.00	26.10	24.00
7	10.00	8.10	6.00	26	29.00	27.10	25.00
8	11.00	9.10	7.00	27	30.00	28.10	26.00
9	12.00	10.10	8.00	28	31.00	29.10	27.00
10	13.00	11.10	9.00	29	32.00	30.10	28.00
11	14.00	12.10	10.00	30	33.00	31.10	29.00
12	15.00	13.10	11.00	31	34.00	32.10	30.00
13	16.00	14.10	12.00	32	35.00	33.10	31.00
14	17.00	15.10	13.00	33	36.00	34.10	32.00
15	18.00	16.10	14.00	34	37.00	35.10	33.00
16	19.00	17.10	15.00	35	38.00	36.10	34.00
17	20.00	18.10	16.00	36	39.00	37.10	35.00
18	21.00	19.10	17.00				
19	22.00	20.10	18.00				
20	23.00	21.10	19.00				



鼎掄實業有限公司  
DINGLUN INDUSTRIAL CO., LTD.

TITLE  
1.0PH 5.6H 無蓋斜角立貼雙接反腳位

DRAWN:	michael lin 2017/08/23	TOLERANCE	SCALE	P/N NO.	FPCG-10560ITDR-xx-xx
CHECKED:	Eddie Liu 2017/08/23	.XX±0.20	None	DWG. NO.	
APPROVED:	Eddie Liu 2017/08/24	.XXX±0.10	mm	CUSTOMER P/N NO.	
		PROJECTION	REV.		
		⊕	A		

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			