

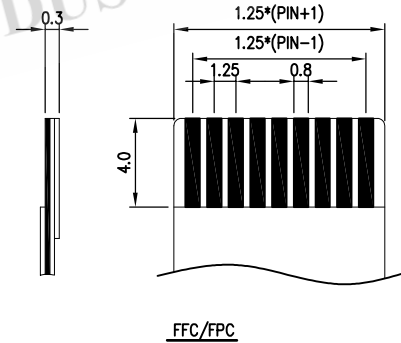
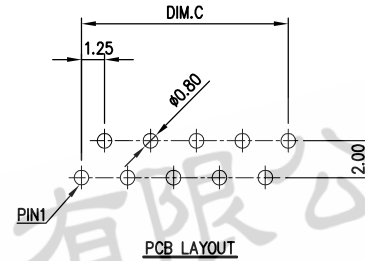
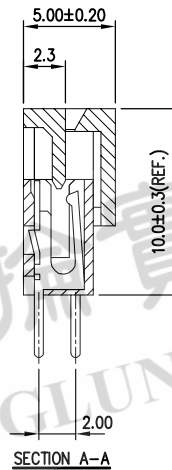


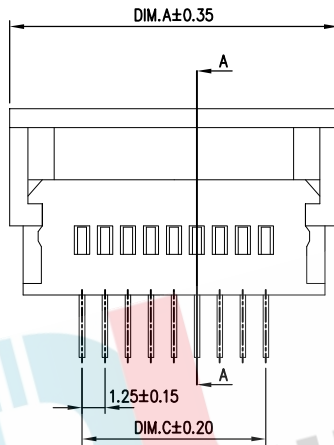

SPEC :
 1.Housing:GLASS-REINFORCEED THERMOPLA
 2.Contact:COPPER ALLOY
 3.PLATING:TIN PLATING OVER NICKEL
 4.Temperature Rating:-25°C~+85°C



●: 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C
3	9.55	5.20	2.50
4	10.80	6.45	3.75
5	12.05	7.70	5.00
6	13.30	8.95	6.25
7	14.55	10.20	7.50
8	15.80	11.45	8.75
9	17.05	12.70	10.00
10	18.30	13.95	11.25
11	19.55	15.20	12.50
12	20.80	16.45	13.75
13	22.05	17.70	15.00
14	23.30	18.95	16.25
15	24.55	20.20	17.50
16	25.80	21.45	18.75
17	27.05	22.70	20.00
18	28.30	23.95	21.25
19	29.55	25.20	22.50
20	30.80	26.45	23.75
21	32.05	27.70	25.00
22	33.30	28.95	26.25
23	34.55	30.20	27.50
24	35.80	31.45	28.75
25	37.05	32.70	30.00
26	38.30	33.95	31.25
27	39.55	35.20	32.50
28	40.80	36.45	33.75
29	42.05	37.70	35.00
30	43.30	38.95	36.25
31	44.55	40.20	37.50
32	45.80	41.45	38.75

ORDERING INFORMATION:

FPCG - 12100 DVSP - xx - T - T

PLATING: T=TIN
 PACKING T=TUBE
 NO. of contacts
 Series name
 PITCH=1.25mm
 FPC SERIES



鼎掄實業有限公司 DINGLUN INDUSTRIAL CO., LTD.		TITLE FPC 1.25PH 10.0H 抽屜直插單接正腳位	
DRAWN: michael lin 2011/01/22	TOLERANCE .X±0.30 .XX±0.20 .XXX±0.10	SCALE None UNIT mm	P/N NO. FPCG-12100DVSP-xx-xx
CHECKED: Eddie Liu 2011/01/22	APPROVED: Eddie Liu 2011/01/22	PROJECTION 	REV. A DWG. NO. CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			