
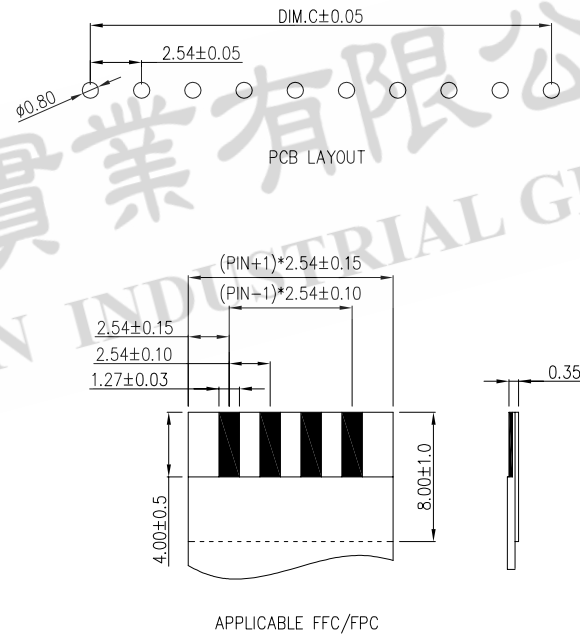


- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V
Color:Black
 - 2.Locker:High-Temp Plastic,UL94-V
Color:Black
 - 3.Contact:Phosphor Bronze
Initial:30m Ohms Max.
Voltage Rating:50V AC,DC
 - 4.Solder Tab:BRASS
 - 5.Temperature Rating:-55°C~+85°C
 - 6.Dielectric Withstanding Voltage:500V AC/Min

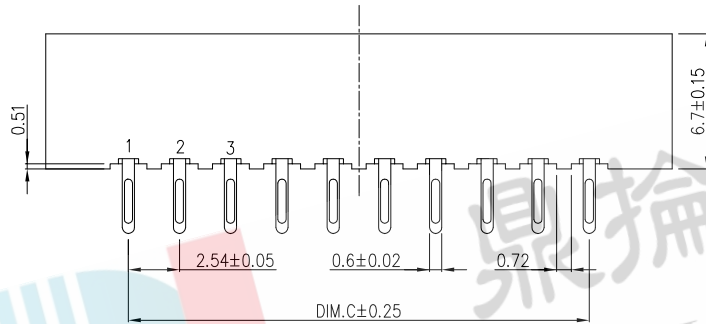

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C
2	10.74	8.43	2.54
3	13.28	10.97	5.08
4	15.82	13.51	7.62
5	18.36	16.05	10.16
6	20.9	18.59	12.7
7	23.44	21.13	15.24
8	25.98	23.67	17.78
9	28.52	26.21	20.32
10	31.06	28.75	22.86
11	33.6	31.29	25.4
12	36.14	33.83	27.94
13	38.68	36.37	30.48
14	41.22	38.91	33.02
15	43.76	41.45	35.56
16	46.3	43.99	38.1
17	48.84	46.53	40.64
18	51.38	49.07	43.18

ORDERING INFORMATION:

FPCQ - 25670 FVDE - xx - x - x

- PLATING: T=TIN
- PACKING T=TUBE
- NO. of contacts
- Series name
- PITCH=2.54mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 2.54PH 6.7H 無蓋平面直插雙接

DRAWN: *michael lin* 2010/10/22
CHECKED: *Eddie Liu* 2010/10/22
APPROVED: *Eddie Liu* 2010/10/22

TOLERANCE: .X±0.30
SCALE: None
P/N NO. FPCQ-25670FVDE-xx-xx
UNIT: mm
PROJECTION: A
REV. A
DWG. NO.
CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN