

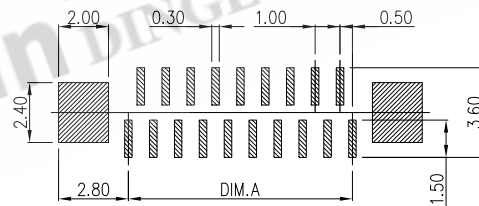
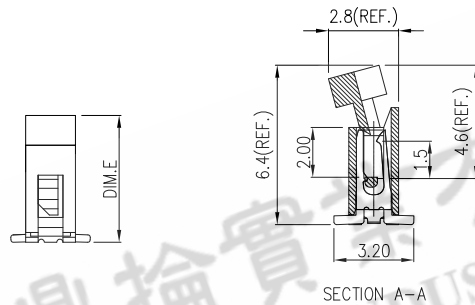


- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Natural
 - Locker: High-Temp Plastic, UL94-V
Color: Black
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -25°C ~ +85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

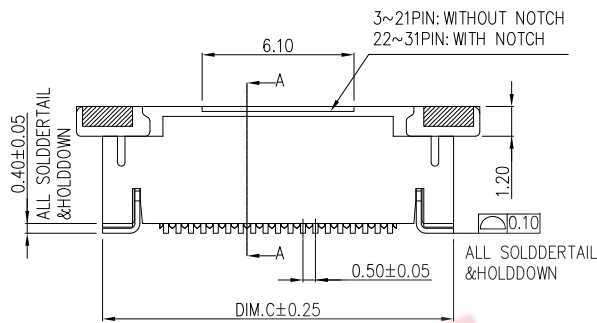

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05



FFC/FFPC DIMENSION
THICKNESS 0.30±0.03 mm

●: 表示現有可提供PIN數						
PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	
31	15.00	16.10	20.10	22.20		
32	15.50	16.60	20.60	22.70		
33	16.00	17.10	21.10	23.20		
34	16.50	17.60	21.60	23.70		
35	17.00	18.10	22.10	24.20		
36	17.50	18.60	22.60	24.70		
37	18.00	19.10	23.10	25.20		
38	18.50	19.60	23.60	25.70		
39	19.00	20.10	24.10	26.20		
40	19.50	20.60	24.60	26.70		
41	20.00	21.10	25.10	27.20		
42	20.50	21.60	25.60	27.70		
43	21.00	22.10	26.10	28.20		
44	21.50	22.60	26.60	28.70		
45	22.00	23.10	27.10	29.20		
46	22.50	23.60	27.60	29.70	5.10	
47	23.00	24.10	28.10	30.20		
48	23.50	24.60	28.60	30.70		
49	24.00	25.10	29.10	31.20		
50	24.50	25.60	29.60	31.70		
51	25.00	26.10	30.10	32.20		
52	25.50	26.60	30.60	32.70		
53	26.00	27.10	31.10	33.20		
54	26.50	27.60	31.60	33.70		
55	27.00	28.10	32.10	34.20		
56	27.50	28.60	32.60	34.70		
57	28.00	29.10	33.10	35.20		
58	28.50	29.60	33.60	35.70		
59	29.00	30.10	34.10	36.20		
60	29.50	30.60	34.60	36.70		
61	30.00	31.10	35.10	37.20		

ORDERING INFORMATION:

FPCS - 05510 DTSP - xx - x - x - x

- 1=ROHS 2=HALOGEN FREE
- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=0.5mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 0.5PH 5.1H 抽屜立貼單接正腳位




DRAWN: **michael lin**
2016/04/25
TOLERANCE: .X±0.30
SCALE: None
CHECKED: **Eddie Liu**
2016/04/25
UNIT: .XXX±0.10 mm
APPROVED: **Eddie Liu**
2016/04/26
PROJECTION: REV: A

P/N NO.
FPCS-05510DTSP-xx-xxx





DWG. NO.

CUSTOMER P/N NO.


REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			
8			
9			

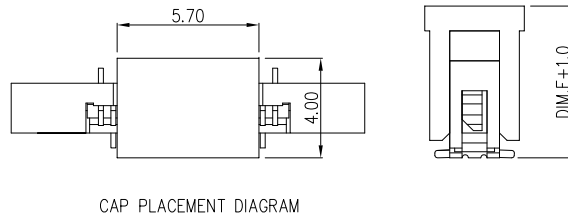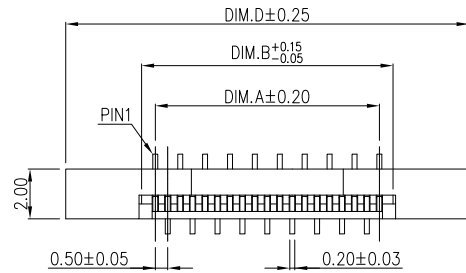

- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Black
 - Locker: High-Temp Plastic, UL94-V
Color: Black
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -25°C ~ +85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

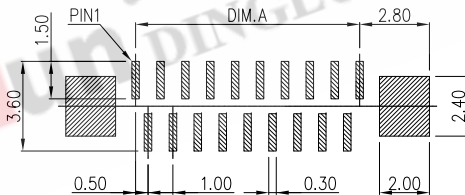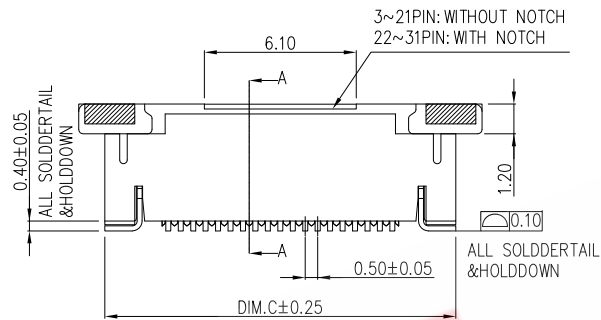

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05



ORDERING INFORMATION:

FPCS - 05510 DTSR - xx - x - x - x

- 1=ROHS 2=HALOGEN FREE
- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=0.5mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 0.5PH 5.1H 抽屜立貼單接反腳位

DRAWN: michael lin
2014/05/18

TOLERANCE .X ± 0.30
SCALE None

P/N NO. FPCS-05510DTSR-xx-xxx

CHECKED: Eddie Liu
2014/05/18

UNIT .XX ± 0.20
mm

DWG. NO.

APPROVED: Eddie Liu
2014/05/18

PROJECTION REV. A

CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			

● : 表示現有可提供PIN數						
PIN	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E	
31	15.00	16.10	20.10	22.20		
32	15.50	16.60	20.60	22.70		
33	16.00	17.10	21.10	23.20		
34	16.50	17.60	21.60	23.70		
35	17.00	18.10	22.10	24.20		
36	17.50	18.60	22.60	24.70		
37	18.00	19.10	23.10	25.20		
38	18.50	19.60	23.60	25.70		
39	19.00	20.10	24.10	26.20		
40	19.50	20.60	24.60	26.70		
41	20.00	21.10	25.10	27.20		
42	20.50	21.60	25.60	27.70		
43	21.00	22.10	26.10	28.20		
44	21.50	22.60	26.60	28.70		
45	22.00	23.10	27.10	29.20		
46	22.50	23.60	27.60	29.70	5.10	
47	23.00	24.10	28.10	30.20		
48	23.50	24.60	28.60	30.70		
49	24.00	25.10	29.10	31.20		
50	24.50	25.60	29.60	31.70		
51	25.00	26.10	30.10	32.20		
52	25.50	26.60	30.60	32.70		
53	26.00	27.10	31.10	33.20		
54	26.50	27.60	31.60	33.70		
55	27.00	28.10	32.10	34.20		
56	27.50	28.60	32.60	34.70		
57	28.00	29.10	33.10	35.20		
58	28.50	29.60	33.60	35.70		
59	29.00	30.10	34.10	36.20		
60	29.50	30.60	34.60	36.70		
61	30.00	31.10	35.10	37.20		