
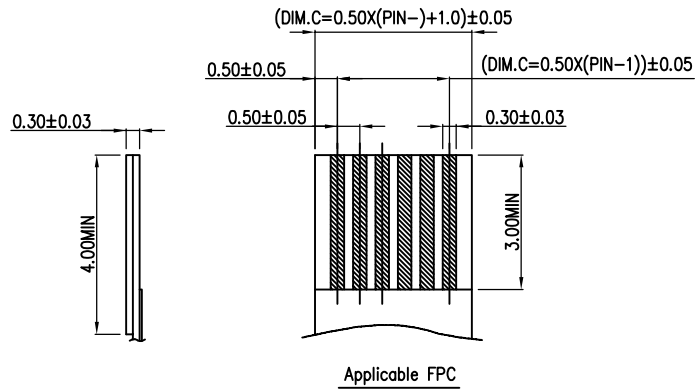
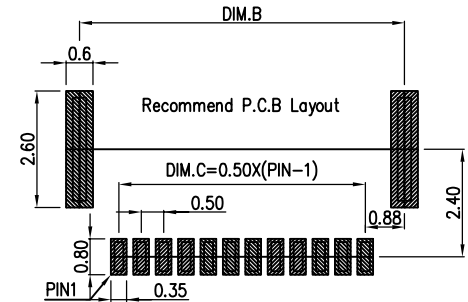





SPEC :

- Housing: High-Temp Plastic, UL94-V
Color: Nature
- Locker: High-Temp Plastic, UL94-V
Color: Nature
- Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
- Solder Tab: BRASS
- Temperature Rating: -25°C ~ +85°C
- Dielectric Withstanding Voltage: 500V AC/Min

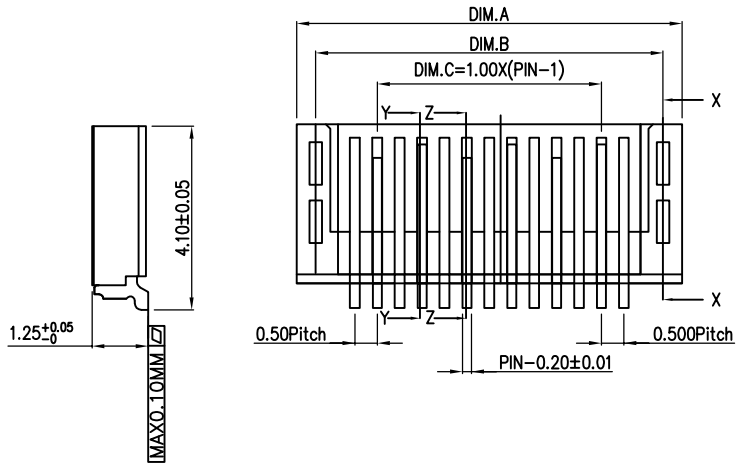

ORDERING INFORMATION:

FPCZ - 05120 SHDE - xx - x - G -

PLATING: G=GOLD FLASH
PACKING T=TUBE R=REEL
NO. of contacts
Series name
PITCH=0.5mm
FPC SERIES

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.D
	6	5.10	4.25	3.60
	8	6.10	5.25	4.60
	10	7.10	6.25	5.60
	12	8.10	7.25	6.60
	14	9.10	8.25	7.60
	15	9.60	8.75	8.10
	16	10.10	9.25	8.60



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 0.5PH 1.2H 無蓋有焊隊貼雙接鍍金

DRAWN: michael lin 2017/08/22
CHECKED: Eddie Liu 2017/08/22
APPROVED: Eddie Liu 2017/08/23

TOLERANCE: .X±0.30
SCALE: None
P/N NO. FPCZ-05120SHDE-xx-xG
UNIT: mm
DWG. NO.
PROJECTION: A
REV. A
CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN