


Recommended P.C.B Layout

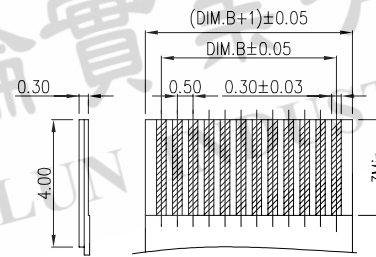

Applicable FPC

- SPEC :
- Housing: High-Temp Plastic, UL94-V  
Color: Black
  - Locker: High-Temp Plastic, UL94-V  
Color: Black
  - Contact: Phosphor Bronze  
Initial: 30m Ohms Max.  
Voltage Rating: 50V AC, DC
  - Solder Tab: BRASS
  - Temperature Rating: -25°C ~ +85°C
  - Dielectric Withstanding Voltage: 500V AC/Min

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
4	5.53	1.50	2.57	33	20.03	16.00	17.07
5	6.03	2.00	3.07	34	20.53	16.50	17.57
6	6.53	2.50	3.57	35	21.03	17.00	18.07
7	7.03	3.00	4.07	36	21.53	17.50	18.57
8	7.53	3.50	4.57	37	22.03	18.00	19.07
9	8.03	4.00	5.07	38	22.53	18.50	19.57
10	8.53	4.50	5.57	39	23.03	19.00	20.07
11	9.03	5.00	6.07	40	23.53	19.50	20.57
12	9.53	5.50	6.57	41	24.03	20.00	21.07
13	10.03	6.00	7.07	42	24.53	20.50	21.57
14	10.53	6.50	7.57	43	25.03	21.00	22.07
15	11.03	7.00	8.07	44	25.53	21.50	22.57
16	11.53	7.50	8.57	45	26.03	22.00	23.07
17	12.03	8.00	9.07	46	26.53	22.50	23.57
18	12.53	8.50	9.57	47	27.03	23.00	24.07
19	13.03	9.00	10.07	48	27.53	23.50	24.57
20	13.53	9.50	10.57	49	28.03	24.00	25.07
21	14.03	10.00	11.07	50	28.53	24.50	25.57
22	14.53	10.50	11.57	51	29.03	25.00	26.07
23	15.03	11.00	12.07	52	29.53	25.50	26.57
24	15.53	11.50	12.57	53	30.03	26.00	27.07
25	16.03	12.00	13.07	54	30.53	26.50	27.57
26	16.53	12.50	13.57	55	31.03	27.00	28.07
27	17.03	13.00	14.07	56	31.53	27.50	28.57
28	17.53	13.50	14.57	57	32.03	28.00	29.07
29	18.03	14.00	15.07	58	32.53	28.50	29.57
30	18.53	14.50	15.57	59	33.03	29.00	30.07
31	19.03	15.00	16.07	60	33.53	29.50	30.57
32	19.53	15.50	16.57				

ORDERING INFORMATION:

FPCZ - 05150 SHDE - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=0.5mm
- FPC SERIES



**鼎掄實業有限公司**  
DINGLUN INDUSTRIAL CO., LTD.

TITLE  
FPC 0.5PH 1.5H 無蓋有焊臥貼雙接

DRAWN:	michael lin 2017/08/22	TOLERANCE	SCALE
		.X±0.30	None
CHECKED:	Eddie Liu 2017/08/22	.XX±0.20	UNIT
		.XXX±0.10	mm
APPROVED:	Eddie Liu 2017/08/23	PROJECTION	REV.
		⊕ ⊖	A

P/N NO. FPCZ-05150SHDE-xx-x-x

DWG. NO.

CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			