


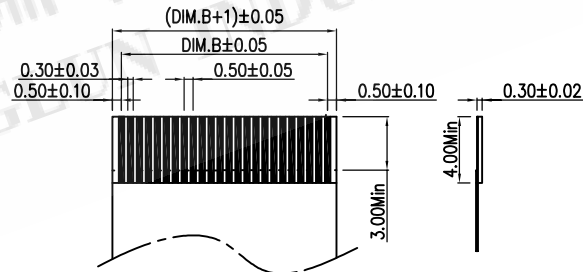
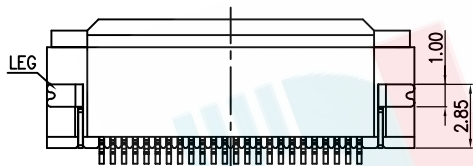
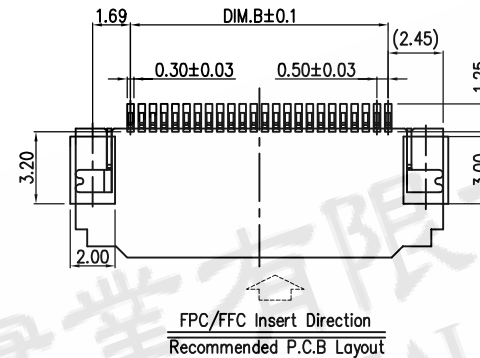


Section A-A
Scale 2:1



- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Bess
 - Locker: High-Temp Plastic, UL94-V
Color: Black
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -25°C ~ +85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

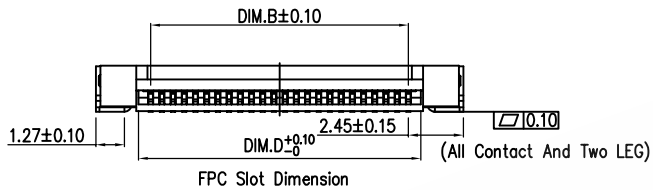

Recommended FPC Dimension

		●: 可提供PIN數 ★: 有量產PIN數							
	PIN	DIM.A	DIM.B	DIM.C	DIM.D		PIN	DIM.A	DIM.B
★	4	6.40	1.50	6.00	2.50	●	43	25.90	21.00
●	5	6.90	2.00	6.50	3.00	●	44	26.40	21.50
★	6	7.40	2.50	7.00	3.50	★	45	26.90	22.00
●	7	7.90	3.00	7.50	4.00	●	46	27.40	22.50
★	8	8.40	3.50	8.00	4.50	●	47	27.90	23.00
●	9	8.90	4.00	8.50	5.00	●	48	28.40	23.50
★	10	9.40	4.50	9.00	5.50	★	49	28.90	24.00
★	11	9.90	5.00	9.50	6.00	★	50	29.40	24.50
★	12	10.40	5.50	10.00	6.50	●	51	29.90	25.00
●	13	10.90	6.00	10.50	7.00	●	52	30.40	25.50
★	14	11.40	6.50	11.00	7.50	●	53	30.90	26.00
★	15	11.90	7.00	11.50	8.00	★	54	31.40	26.50
★	16	12.40	7.50	12.00	8.50	●	55	31.90	27.00
★	17	12.90	8.00	12.50	9.00	★	56	32.40	27.50
★	18	13.40	8.50	13.00	9.50	●	57	32.90	28.00
★	19	13.90	9.00	13.50	10.00	●	58	33.40	28.50
★	20	14.40	9.50	14.00	10.50	●	59	33.90	29.00
★	21	14.90	10.00	14.50	11.00	★	60	34.40	29.50
★	22	15.40	10.50	15.00	11.50	★	61	34.90	30.00
●	23	15.90	11.00	15.50	12.00	●	62	35.40	30.50
★	24	16.40	11.50	16.00	12.50	●	63	35.90	31.00
★	25	16.90	12.00	16.50	13.00	●	64	36.40	31.50
★	26	17.40	12.50	17.00	13.50	●	65	36.90	32.00
●	27	17.90	13.00	17.50	14.00	●	66	37.40	32.50
●	28	18.40	13.50	18.00	14.50	●	67	37.90	33.00
★	29	18.90	14.00	18.50	15.00	★	68	38.40	33.50
★	30	19.40	14.50	19.00	15.50	●	69	38.90	34.00
★	31	19.90	15.00	19.50	16.00	●	70	39.40	34.50
★	32	20.40	15.50	20.00	16.50	●	71	39.90	35.00
★	33	20.90	16.00	20.50	17.00	●	72	40.40	35.50
●	34	21.40	16.50	21.00	17.50	●	73	40.90	36.00
●	35	21.90	17.00	21.50	18.00	●	74	41.40	36.50
★	36	22.40	17.50	22.00	18.50	●	75	41.90	37.00
●	37	22.90	18.00	22.50	19.00	●	76	42.40	37.50
●	38	23.40	18.50	23.00	19.50	●	77	42.90	38.00
●	39	23.90	19.00	23.50	20.00	●	78	43.40	38.50
★	40	24.40	19.50	24.00	20.50	●	79	43.90	39.00
★	41	24.90	20.00	24.50	21.00	★	80	44.40	39.50
●	42	25.40	20.50	25.00	21.50				

ORDERING INFORMATION:

FPCZ - 05200 PHCE - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=0.5mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 0.5PH 2.0H 掀蓋臥貼前插

DRAWN: michael lin
2017/07/22
CHECKED: Eddie Liu
2017/07/22
APPROVED: Eddie Liu
2017/07/23

TOLERANCE SCALE P/N NO.
.X±0.30 None FPCZ-05200PHCE-xx-xx
.XX±0.20 UNIT DWG. NO.
.XXX±0.10 mm
PROJECTION REV. CUSTOMER P/N NO.
A

REV.	REASONS	DATE	DRAWN
△			
△			
△			