
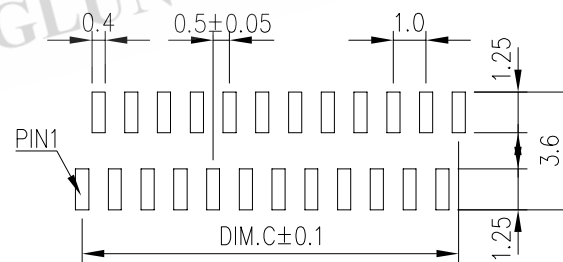
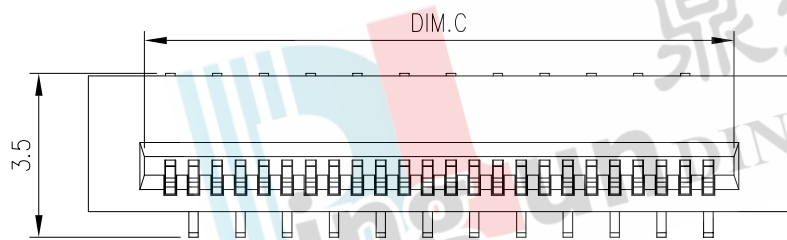
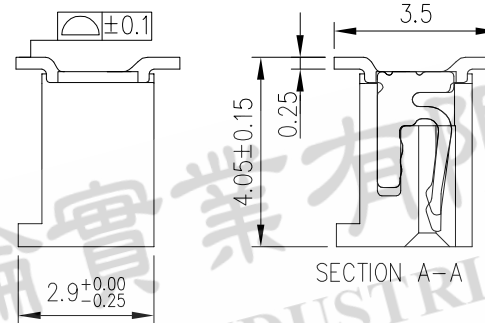


SPEC :

- 1.Terminal:Phosphor Bronze Tin-plated
- 2.Fitting Nial:Phosphor Bronze Tin-plated
- 3.Housing:High-Temp Plastic,UL94-V
- 4.Current Rating:0.4A AC/DC
- 5.Voltage Rating:50V AC/DC
- 6.Temperature Rating:-25°C~+85°C AC/Min
- 7.Withstand Voltage:200V AC/min
- 5.Contact Resistance:≤20mΩ
- 5.Insulation Resistance:≥500mΩ

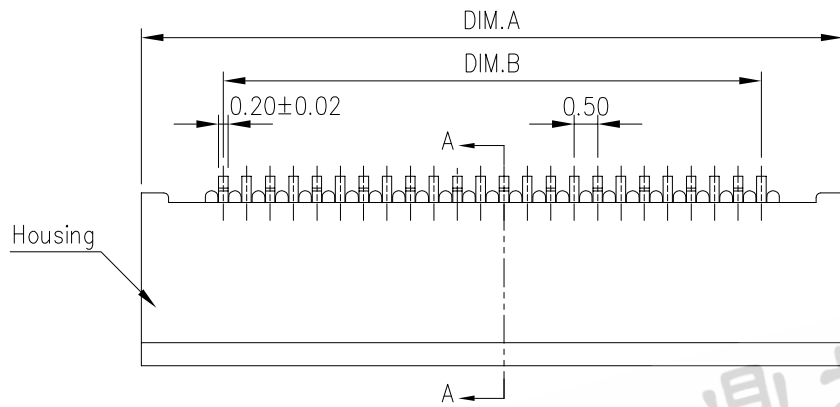

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
6	6.00	2.50	3.60	29	17.50	14.00	15.10
7	6.50	3.00	4.10	30	18.00	14.50	15.60
8	7.00	3.50	4.60	31	18.50	15.00	16.10
9	7.50	4.00	5.10	32	19.00	15.50	16.60
10	8.00	4.50	5.60	33	19.50	16.00	17.10
11	8.50	5.00	6.10	34	20.00	16.50	17.60
12	9.00	5.50	6.60	35	20.50	17.00	18.10
13	9.50	6.00	7.10	36	21.00	17.50	18.60
14	10.00	6.50	7.60	37	21.50	18.00	19.10
15	10.50	7.00	8.10	38	22.00	18.50	19.60
16	11.00	7.50	8.60	39	22.50	19.00	20.10
17	11.50	8.00	9.10	40	23.00	19.50	20.60
18	12.00	8.50	9.60	41	23.50	20.00	21.10
19	12.50	9.00	10.10	42	24.00	20.50	21.60
20	13.00	9.50	10.60	43	24.50	21.00	22.10
21	13.50	10.00	11.10	44	25.00	21.50	22.60
22	14.00	10.50	11.60	45	25.50	22.00	23.10
23	14.50	11.00	12.10	46	26.00	22.50	23.60
24	15.00	11.50	12.60	47	26.50	23.00	24.10
25	15.50	12.00	13.10	48	27.00	23.50	24.60
26	16.00	12.50	13.60	49	27.50	24.00	25.10
27	16.50	13.00	14.10	50	28.00	24.50	25.60
28	17.00	13.50	14.60				

ORDERING INFORMATION:

FPCZ - 05405 NTSP - xx -x -x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL M=REEL+MYLAR
- NO. of contacts
- Series name
- PITCH=0.5mm
- FPC SERIES



**鼎掄實業有限公司**  
DINGLUN INDUSTRIAL CO., LTD.

TITLE  
FPC 0.5PH 4.05H 無蓋無焊立貼單接正腳位

DRAWN: **michael lin** 2017/08/22  
TOLERANCE: .X±0.30  
SCALE: None  
CHECKED: **Eddie Liu** 2017/08/22  
UNIT: .XX±0.20  
mm  
APPROVED: **Eddie Liu** 2017/08/23  
PROJECTION:   
REV: A

P/N NO. FPCZ-05405NTSP-xx-xx  
DWG. NO.  
CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			
6			
7			