


- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V  
Color:Beige
  - 2.Locker:High-Temp Plastic,UL94-V  
Color:Black
  - 3.Contact:Phosphor Bronze  
Initial:30m Ohms Max.  
Voltage Rating:50V AC,DC
  - 4.Solder Tab:BRASS
  - 5.Temperature Rating:-25°C~+85°C
  - 6.Dielectric Withstanding Voltage:500V AC/Min

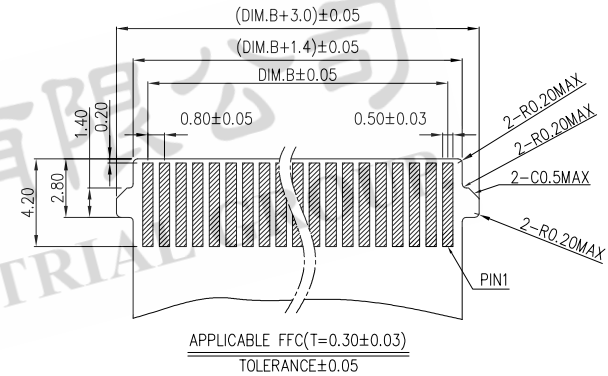

ORDERING INFORMATION:

FPCZ - 08200 PHCB -xx -x -x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=0.8mm
- FPC SERIES

RECOMMENDED PCB LAYOUT  
TOLERANCE±0.05

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C
	30	29.1	23.2	24.66
	32	30.7	24.8	26.26



**鼎掄實業有限公司**  
DINGLUN INDUSTRIAL CO., LTD.

TITLE  
FPC 0.8PH 2.0H 掀蓋臥式前插蝴蝶扣

DRAWN: **michael lin**  
2015/08/22

TOLERANCE SCALE  
.X±0.30 None

P/N NO. FPCZ-08200PHCB-xx-xx

CHECKED: **Eddie Liu**  
2015/08/22

UNIT  
.XXX±0.10 mm

DWG. NO.

APPROVED: **Eddie Liu**  
2015/08/23

PROJECTION REV.  
A

CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			