
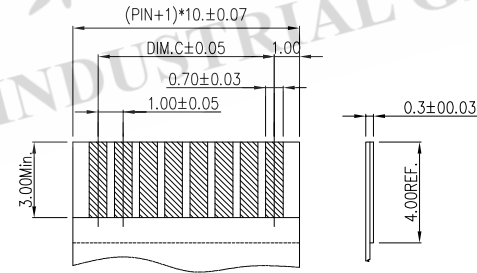



RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05



APPLICABLE FFC
TOLERANCE: ±0.05

SPEC :

- Housing: High-Temp Plastic, UL94-V
Color: Nature
- Locker: High-Temp Plastic, UL94-V
Color: Black
- Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
- Solder Tab: BRASS
- Temperature Rating: -55°C ~ +85°C
- Dielectric Withstanding Voltage: 500V AC/Min

● : 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	DIM.D
4	10.50	9.30	3.00	5.08
5	11.50	10.30	4.00	6.08
6	12.50	11.30	5.00	7.08
7	13.50	12.30	6.00	8.08
8	14.50	13.30	7.00	9.08
9	15.50	14.30	8.00	10.08
10	16.50	15.30	9.00	11.08
11	17.50	16.30	10.00	12.08
12	18.50	17.30	11.00	13.08
13	19.50	18.30	12.00	14.08
14	20.50	19.30	13.00	15.08
15	21.50	20.30	14.00	16.08
16	22.50	21.30	15.00	17.08
17	23.50	22.30	16.00	18.08
18	24.50	23.30	17.00	19.08
19	25.50	24.30	18.00	20.08
20	26.50	25.30	19.00	21.08
21	27.50	26.30	20.00	22.08
22	28.50	27.30	21.00	23.08
23	29.50	28.30	22.00	24.08
24	30.50	29.30	23.00	25.08
25	31.50	30.30	24.00	26.08
26	32.50	31.30	25.00	27.08
27	33.50	32.30	26.00	28.08
28	34.50	33.30	27.00	29.08
29	35.50	34.30	28.00	30.08

ORDERING INFORMATION:

FPCZ - 10120 DHUE -xx -x -x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE

PFC 1.0PH 1.2H 抽屜式上接

DRAWN: **michael lin**
2017/08/22

TOLERANCE SCALE
.X±0.30 None

P/N NO.

FPCZ-10120DHUE-xx-xx

CHECKED: **Eddie Liu**
2017/08/22

.XX±0.20 UNIT
.XXX±0.10 mm

DWG. NO.

APPROVED: **Eddie Liu**
2017/08/23

PROJECTION REV. A

CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			

5	6	7	8	9