
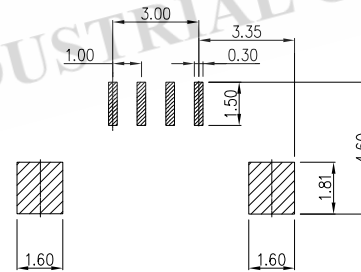






- SPEC :
- 1.Housing:High-Temp Plastic,UL94-V  
Color:Nature
  - 2.Locker:High-Temp Plastic,UL94-V  
Color:Black
  - 3.Contact:Phosphor Bronze  
Initial:30m Ohms Max.  
Voltage Rating:50V AC,DC
  - 4.Solder Tab:BRASS
  - 5.Temperature Rating:-25°C~+85°C
  - 6.Dielectric Withstanding Voltage:500V AC/Min



TOLERANCE: ±0.05

RECOMMEND P.C.B LAYOUT  
TOLERANCE: ±0.05

4PIN 專用

ORDERING INFORMATION:

FPCZ - 10150 PHCE - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES



鼎掄實業有限公司 DINGLUN INDUSTRIAL CO. LTD.		TITLE FPC 1.0PH 1.5H 掀蓋臥貼前插 (FOR4PIN)	
DRAWN:	<i>michael lin</i> 2017/08/22	TOLERANCE	SCALE
CHECKED:	<i>Eddie Liu</i> 2017/08/22	.X±0.30	None
APPROVED:	<i>Eddie Liu</i> 2017/08/23	.XX±0.20	UNIT
		.XXX±0.10	mm
		PROJECTION	REV.
		⊕	A
P/N NO.		FPCZ-10150PHCE-xx-xx	
DWG. NO.			
CUSTOMER P/N NO.			

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			