

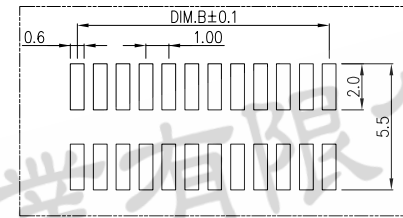

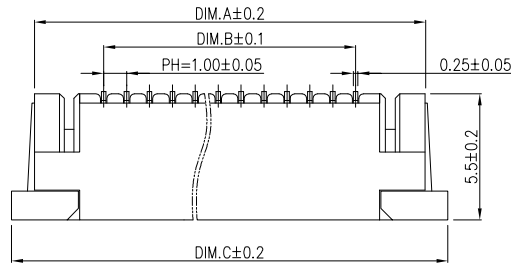


- SPEC :
- Housing: High-Temp Plastic, UL94-V
Color: Black
 - Locker: High-Temp Plastic, UL94-V
Color: Black
 - Contact: Phosphor Bronze
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
 - Solder Tab: BRASS
 - Temperature Rating: -25°C ~ +85°C
 - Dielectric Withstanding Voltage: 500V AC/Min

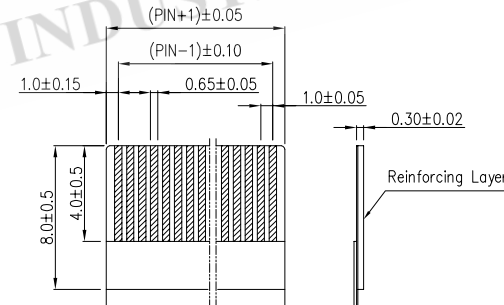

PCB Layout

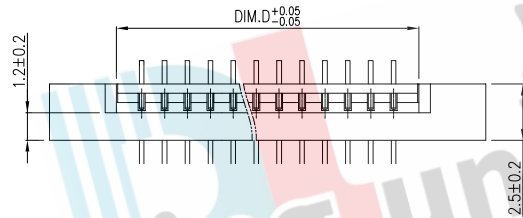

RECOMMENDED FFC/FPC DIM.

● 表示現有可提供PIN數

PIN	DIM.A	DIM.B	DIM.C	DIM.D
4	9.0	3.0	11.0	5.1
5	10.0	4.0	12.0	6.1
6	11.0	5.0	13.0	7.1
7	12.0	6.0	14.0	8.1
8	13.0	7.0	15.0	9.1
9	14.0	8.0	16.0	10.1
10	15.0	9.0	17.0	11.1
11	16.0	10.0	18.0	12.1
12	17.0	11.0	19.0	13.1
13	18.0	12.0	20.0	14.1
14	19.0	13.0	21.0	15.1
15	20.0	14.0	22.0	16.1
16	21.0	15.0	23.0	17.1
17	22.0	16.0	24.0	18.1
18	23.0	17.0	25.0	19.1
19	24.0	18.0	26.0	20.1
20	25.0	19.0	27.0	21.1
21	26.0	20.0	28.0	22.1
22	27.0	21.0	29.0	23.1
23	28.0	22.0	30.0	24.1
24	29.0	23.0	31.0	25.1
25	30.0	24.0	32.0	26.1
26	31.0	25.0	33.0	27.1
27	32.0	26.0	34.0	28.1
28	33.0	27.0	35.0	29.1
29	34.0	28.0	36.0	30.1
30	35.0	29.0	37.0	31.1
31	36.0	30.0	38.0	32.1
32	37.0	31.0	39.0	33.1
33	38.0	32.0	40.0	34.1
34	39.0	33.0	41.0	35.1
35	40.0	34.0	42.0	36.1
36	41.0	35.0	43.0	37.1
37	42.0	36.0	44.0	38.1
38	43.0	37.0	45.0	39.1
39	44.0	38.0	46.0	40.1
40	45.0	39.0	47.0	41.1

ORDERING INFORMATION:

FPCZ - 10560 DTSL - xx - x - x

- PLATING: T=TIN G=GOLD FLASH
- PACKING T=TUBE R=REEL
- NO. of contacts
- Series name
- PITCH=1.0mm
- FPC SERIES



鼎掄實業有限公司
DINGLUN INDUSTRIAL CO., LTD.

TITLE
FPC 1.0PH 5.6H 抽屜立式單接平腳

DRAWN: **michael lin**
2017/08/22

CHECKED: **Eddie Liu**
2017/08/22

APPROVED: **Eddie Liu**
2017/08/23

P/N NO. FPCZ-10560DTSL-xx-xx

DWG. NO.

CUSTOMER P/N NO.

REV.	REASONS	DATE	DRAWN
1			
2			
3			
4			
5			

TOLERANCE	SCALE	PROJECTION	REV.
.X±0.30	None	⊕	A
.XX±0.20	UNIT		
.XXX±0.10	mm		